

Job Name/Location:

Tag #:

Date:

For: ☐ File ☐ Resubmit

PO No.:

☐ Approval ☐ Other _____

Architect:

GC:

Engr:

Mech:

Rep:

(Company)

(Project Manager)

PRLK048A0

Electronic Expansion Valve Kit

for AHU Communications Kit



Electrical:

Power Supply Powered by AHU Comm Kit (12 VDC)

Environmental Data:

Operating Temperature -4 -149 °F
Humidity 0-98 % (non-condensing)

Unit Data:

Dimensions (inch) 8-5/8 W x 15-15/16 H x 3-5/16 D
Net Weight (lb) 6.8
Shipping Weight (lb) 7.9

Capacity:

Maximum AHU Capacity (Btu/h) 96,000

Standard Features:

- Controls refrigerant flow between Multi V air or water source units and a 3rd party air handling unit
- Minimum coil entering temperature is 41°F
- Maximum distance between EEV and Comm kit is 32 feet
- Maximum of (1) EEV kit can be connected to Comm kit
- When brazing to EEV kit, use wet cloth to ensure main EEV body temperature does not exceed 248°F
- Designed for indoor installations (field supplied water-proof enclosure must be used when installing outdoors)
- Includes (1) Pipe In and (1) Pipe Out temperature sensor


Communications Cabling Specifications:

Type Stranded, shielded copper cable
Size AWG 18 x 6

AWG - American Wire Gauge

Refrigerant

Refrigerant Type R410A

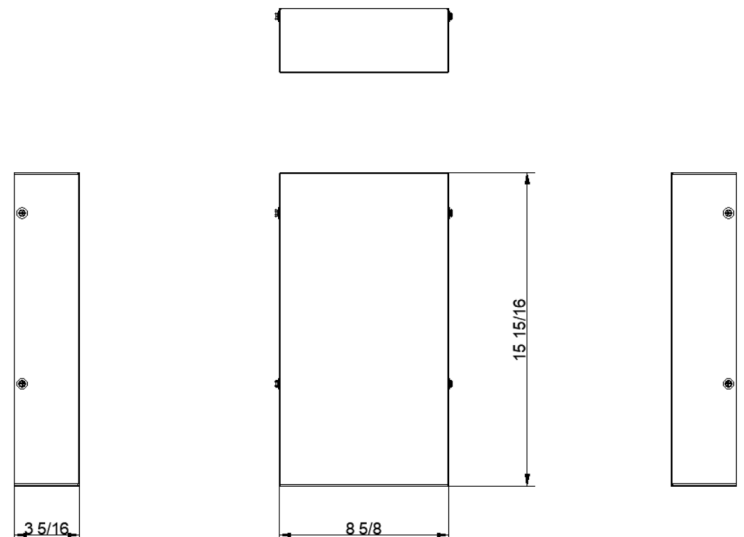

Notes:

1. Must follow installation instructions in the applicable LG installation manual.

PRLK048A0**Electronic Expansion Valve Kit**

for AHU Communications Kit

**LG**

Life's Good

Tag #:**Date:****PO No.:**