

Job Name/Location:

Tag #:

Date:

For: ☐ File ☐ Resubmit

PO No.:

☐ Approval ☐ Other _____

Architect:

GC:

Engr:

Mech:

Rep:

(Company)

(Project Manager)

LVN180HV4**Multi F Vertical Air Handling Unit**

18,000 Btu/h Indoor Unit

**Performance:**

| | |
|--------------------------------|-------------------------|
| Cooling (Min~Rated~Max, Btu/h) | 8,000 ~ 18,000 ~ 24,000 |
| Heating (Min~Rated~Max, Btu/h) | 9,000 ~ 20,000 ~ 23,000 |

Cooling Nominal Test Conditions:

Indoor: 80°F DB/67°F WB

Outdoor: 95°F DB/75°F WB

Heating Nominal Test Conditions:

Indoor: 70°F DB/60°F WB

Outdoor: 47°F DB/43°F WB

Electrical:

| | |
|-------------------------------------|------------------|
| Power Supply (V ¹ /Hz/Ø) | 208-230 / 60 / 1 |
| Rated Amps (A) | 1.1 |

Piping:

| | |
|-----------------------------------|------------|
| Installed Liquid Pipe (in., O.D.) | Ø1/4 |
| Installed Vapor Pipe (in., O.D.) | Ø1/2 |
| Liquid Connection (in., O.D.) | Ø1/4 |
| Vapor Connection (in., O.D.) | Ø1/2 |
| Drain (In, ID) | 3/4 FPT |
| Temperature Sensor | Thermistor |

Standard Features:

- Filter Rack for Field Supplied Air Filter (16 x 20 x 1 inch)

Controls Features:

- ESP control
- Hot start
- Self diagnostics
- Soft dry (dehumidification)
- Weekly schedule
- Controller sold separately
- Inverter (variable speed fan)
- Group control
- Sleep mode
- Timer (on/off)
- Integrated dry contact for 3rd party thermostat

Optional Accessories:

- ☐ Simple Controller - PREMT00U
- ☐ MultiSITE™ CRC1 Remote Controller - PREMTBVC0
- ☐ MultiSITE™ CRC1+ Remote Controller - PREMTBVC1
- ☐ Premium Remote Controller - PREMTA000
- ☐ Wireless Handheld Remote Controller - PQWRHQ0FDB²
- ☐ AC Smart 5 - PACS5A000
- ☐ ACP 5 - PACP5A000
- ☐ LonWorks Gateway - PLNWK100
- ☐ AC Smart IV BACnet - PBACNA000
- ☐ ACP IV BACnet Gateway - PQNFB17C2
- ☐ Dry Contact Unit (1 contact, 24 VAC external power) - PDRYCB100
- ☐ Dry Contact Unit (2 setpoint) - PDRYCB400
- ☐ Remote Button Temperature Sensor - ZRTBS01
- ☐ 3 kW Electric Heater - ANEH033B1¹⁴
- ☐ Wi-Fi Module - PWFMD200
- ☐ Downflow Kit - PNDFJ0

For a complete list of available accessories, contact your LG representative.

For continual product development, LG reserves the right to change specifications without notice.

© LG Electronics U.S.A., Inc., Englewood Cliffs, NJ. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. /www.lghvac.com

Operating Range:

| | |
|-----------------|-------|
| Cooling (°F WB) | 57-77 |
| Heating (°F DB) | 59-81 |

Unit Data:

| | |
|--|----------|
| Refrigerant Type | R410A |
| Refrigerant Control | EEV |
| Sound Pressure ³ H/M/L (±3 dB(A)) | 42/42/41 |
| Net Unit Weight (lbs) | 129 |
| Shipping Weight (lbs) | 140 |

Fan:

| | |
|---|---------------------------------------|
| Type | Sirocco |
| Quantity | 1 |
| Motor/Drive | Brushless Digitally Controlled/Direct |
| Airflow Rate H/M/L (CFM) | 640 / 580 / 480 |
| External Static Pressure ^{4 5} (in wg) | |
| Minimum ESP/Fan Setting Value ⁶ | 0.1/51 |
| Maximum ESP/Fan Setting Value ⁶ | 0.7/95 |

Notes:

1. Acceptable operating voltage is 187V-253V.
2. Requires an LG wired thermostat.
3. Sound Pressure levels are tested in an anechoic chamber under ISO Standard 1996.
4. Adjust fan speed to correct for static pressure increases when using field supplied air filter.
5. At factory fan speed setting.
6. Air flow rate (CFM) at high speed.
7. See Engineering Manual for sensible and latent capacities.
8. All power/communication cable to be minimum 18 AWG, 4-conductor, stranded, shielded or unshielded, and must comply with applicable local and national code. If shielded, must be grounded to the chassis at ODU only.
9. Power wiring cable size must comply with the applicable local and national codes.
10. This unit comes with a dry helium charge.
11. Corresponding refrigerant piping length is in accordance with standard length of each outdoor unit and the level difference is 0 ft. All capacities are net with a combination ratio between 95 – 105%.
12. Must follow installation instructions in the applicable LG installation manual.
13. Includes socket adapters for refrigerant pipe connections.
14. Electric heater accessory available in 3kW, 5kW, 8kW, and 10kW capacities. Refer to the engineering manual for details.
15. Controller not included.



LVN180HV4
Multi F Vertical Air Handling Unit
 18,000 Btu/h Indoor Unit



LG


Life's Good

Tag #:


Date:

PO No.:


Factory Configurations

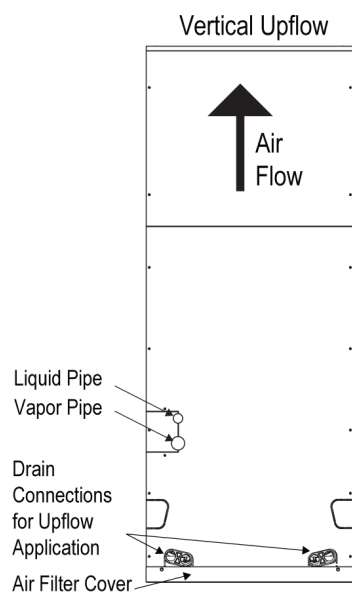


Field Configurations

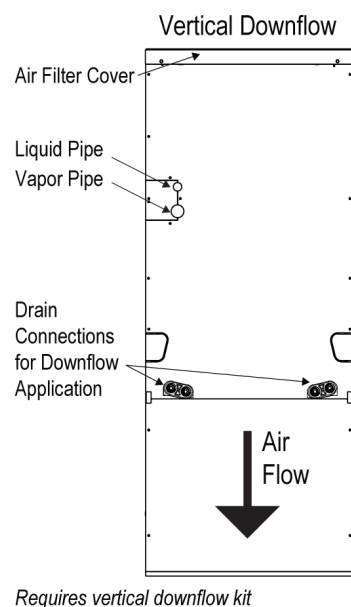

Horizontal Left

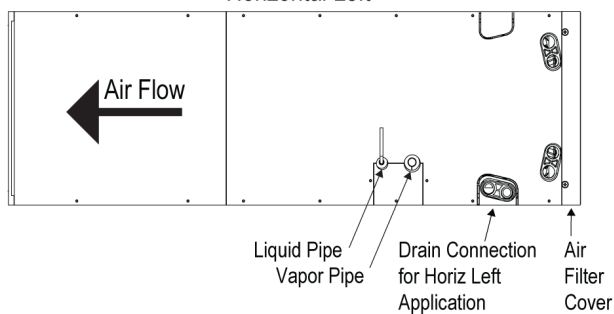

Horizontal Right

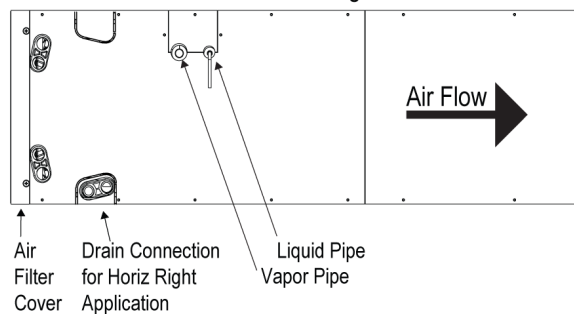

Job Name/Location:

LVN180HV4

Multi F Vertical Air Handling Unit

18,000 Btu/h Indoor Unit

Tag #:

Date:

PO No.:

